

# ENERPOWER

*Nur positive Energie | Only positive energy*

## PRODUKTSPEZIFIKATIONEN PRODUCT SPECIFICATIONS

<b>Produkt</b>	Schaltnetzteil 14,1V / 1A für Akkus LiFePO4 4S (12V)
<b>Product</b>	Switching Power Supply 14.1V / 1A for LiFePO4 Batteries 4S (12V)
<b>Modell</b>	EP-FY1501000
<b>Model</b>	


### Allgemeine technische Daten | General Technical Details

DE	EN		
Eingangsspannung	Input Voltage	Minimal	100V AC 50/60Hz
		Normal	230V AC 50/60Hz
		Maximal	264V AC 50/60Hz
Ladespannung	Charge Voltage	Maximal	14.1 ± 0.1V DC
		Minimal	5V DC
Ladestrom	Charge Current	1A ± 0.2A	
Eingangsstrom	Input Current	No Load	50mA Max @ AC 120V 50/60Hz
		Loading	300mA Max @ AC 120V 50/60Hz
Betriebstemperaturen	Operating Temperatures	(-29)°C - (+45.5)°C	
Lagerhaltungstemperaturen	Storage Temperatures	(-40)°C – (+75)°C	
Zertifizierungen	Certifications	GS CE UL	

# ENERPOWER

*Nur positive Energie | Only positive energy*

Dimensionen (in mm) | Dimensions (in mm)

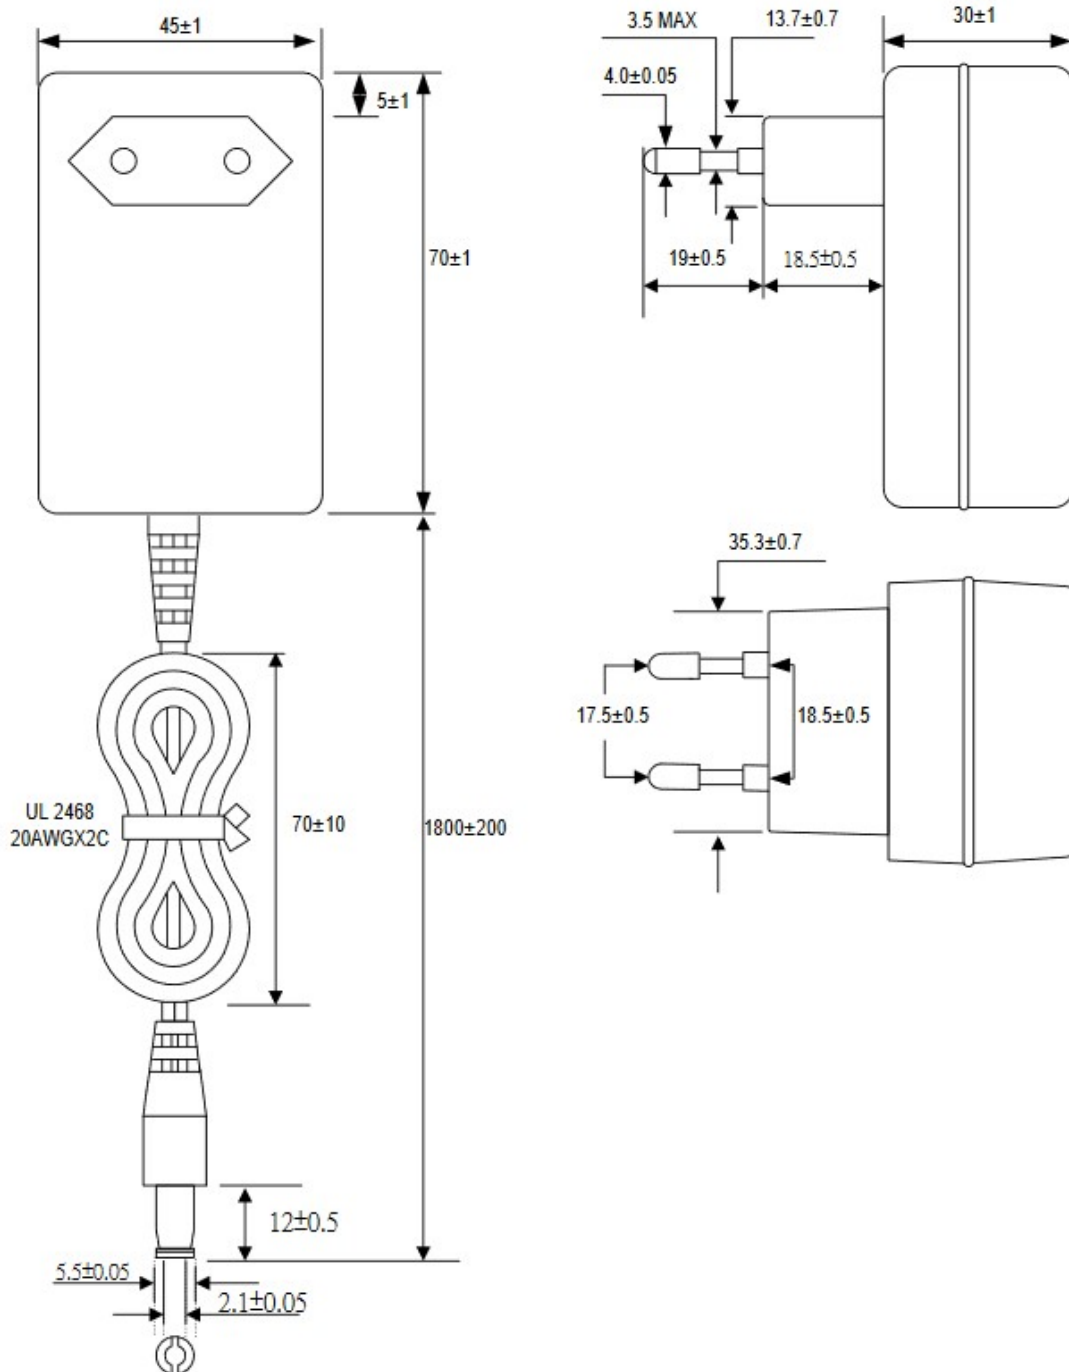

Vertrieb von | Distributed by

ENERdan GmbH | Max-Planck-Straße 7, D-12489 Berlin, Germany | [www.enerpower.de](http://www.enerpower.de)

Tel: +49 (0) 30 5770 344 35 | Fax: +49 (0) 30 5770 344 39 | [sales@enerdan.de](mailto:sales@enerdan.de)

# **ENERPOWER**

*Nur positive Energie | Only positive energy*

Distributor

**ENERdan GmbH**

Max-Planck-Straße 7

D-12489 Berlin

Deutschland | Germany

Tel: +49 (0) 30 5770 344 35

Fax: +49 (0) 30 5770 344 39

Email: [sales@enerdan.de](mailto:sales@enerdan.de)

[www.enerdan.de](http://www.enerdan.de) | [www.enerpower.de](http://www.enerpower.de)

---

Vertrieb von | Distributed by

ENERdan GmbH | Max-Planck-Straße 7, D-12489 Berlin, Germany | [www.enerpower.de](http://www.enerpower.de)

Tel: +49 (0) 30 5770 344 35 | Fax: +49 (0) 30 5770 344 39 | [sales@enerdan.de](mailto:sales@enerdan.de)